




**SPECIFICATION  
CONTROL DRAWING  
Crystal Resonator**

FREQUENCY
32.768000kHz

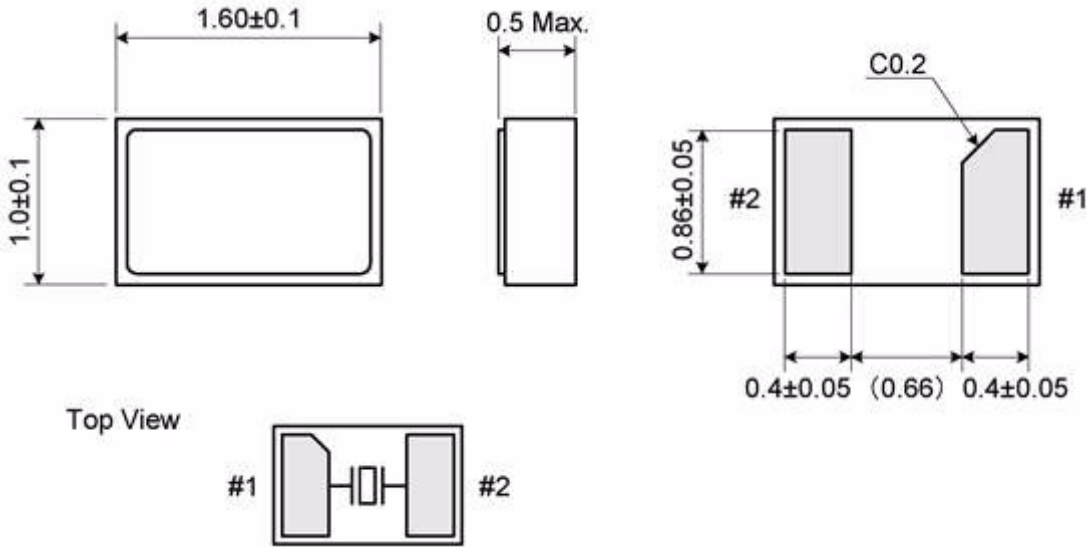

Holder Style	1,6 X 1,0mm
Mode	Fundamental
Adjustment Tolerance	As required by CSR Chipset
Temperature Stability	-0.03 PPM / °C <sup>2</sup>
Operating Temp. Range	-40°C to +85°C
Load Capacitance	12.5 pF
ESR	As required by CSR Chipset
Drive Level	As required by CSR chipset
Ageing	+/- 3ppm /Yr Max
Marking	Mark Std YWW

Amdt Date	Change Note	AEL Code
4 SEP 15	Package corrected	X32K768S262
		<b>Issue Ref</b> B